




www.jblspearguns.com

METHOD USED TO ASSEMBLE SLING INTO SLING CAVITY

Split can be spread by applying strain on shaft in upward direction at Point A. Point B will flex to allow split to spread to accommodate sling wire at Point C.

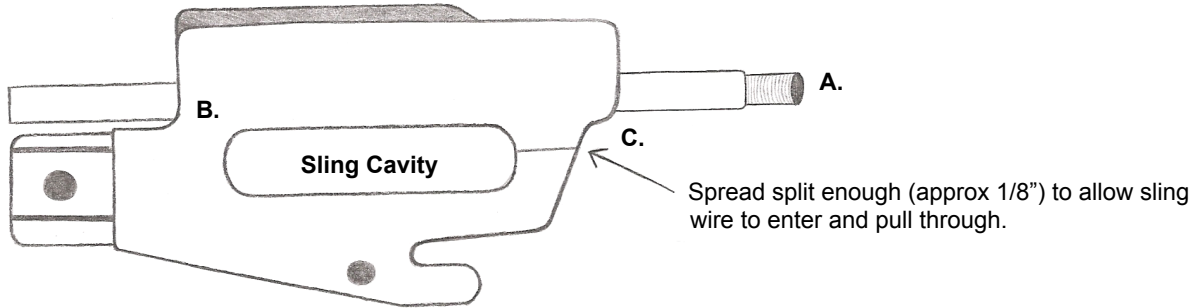

ALTERNATIVE METHODS:

1. Spread slit with screw driver enough to start sling wire.
2. Apply object in sling cavity to apply pressure and then start sling wire through slit.